

[<-- back](#)

MODEL TL-5902


International size reference : 1/2AA, ER14252

TECHNICAL DATA

(Typical Values @+25°C for batteries stored for one year or less)


Nominal capacity @ 1mA TO 2V	1.2Ah
Rated voltage	3.6V
Maximum continuous current	50mA
Maximum pulse current capability	100mA
Rated 1 sec. pulse capability (to 3V)	20mA
Weight	9.2g (0.324 oz.)
Operating temperature range	-55°C to +85°C

U.L. Component recognition MH 12193





AVAILABLE TERMINATIONS

SUFFIX- /S	STANDARD
SUFFIX- /P	AXIAL PINS
SUFFIX- /T	SOLDER TABS
SUFFIX- /PT2	RADIAL PINS

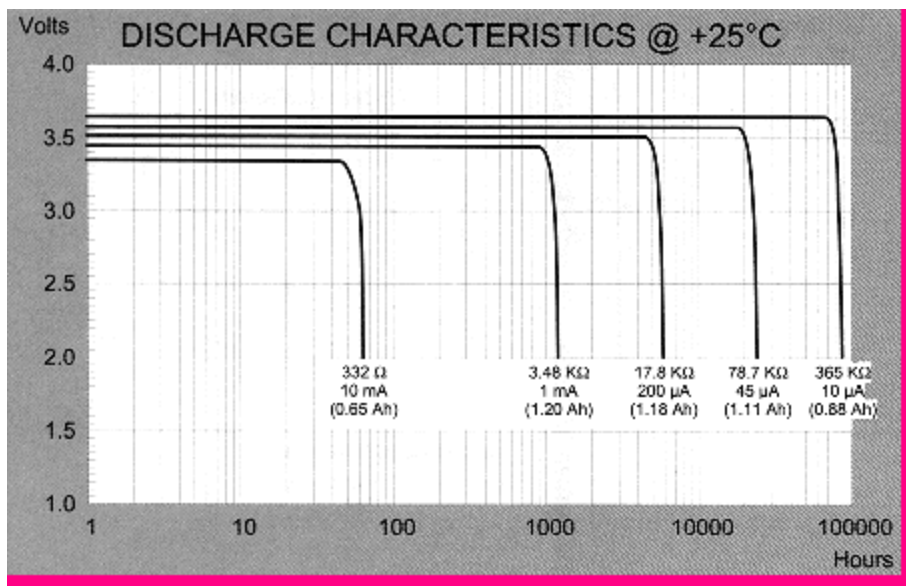

SUFFIX- /PT/TP POLARIZED TABS

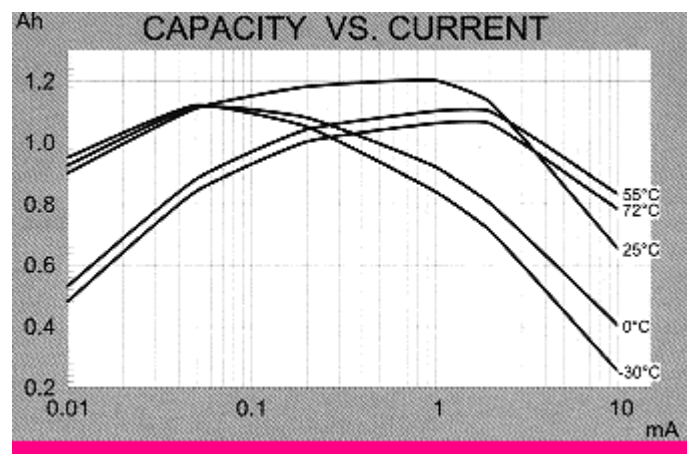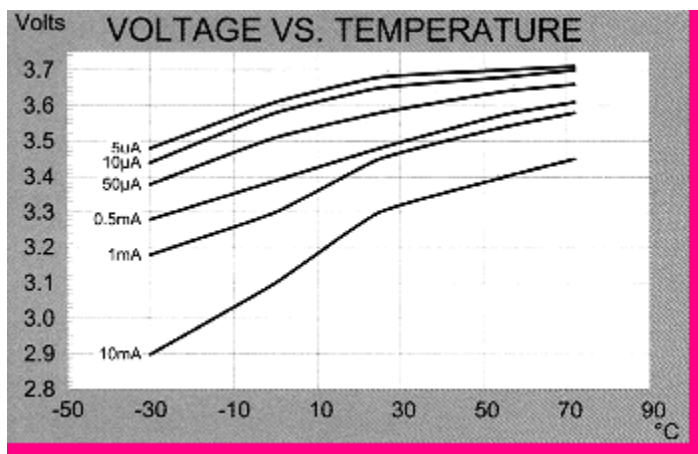

LITHIUM XTRA

Note: Any representations in this website concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

